

KH20-21

Bone Conductor - Data Sheet


Mechanical Data

- Weight approx. 10 g
- Dimensions Length: 24.35 mm
Width: 19.25 mm
Height: 14.75 mm
- Housing Colours Different Colours
- Connection 2-pin (acc. DIN IEC 60118-12)

Electrical Data

- DC Resistance 26 Ohm \pm 10 %
- Nominal Impedance @ 1 kHz 95 Ohm \pm 20 %
- Max. Output (@ 1 V const.) 115 dBOFL \pm 3 dB @ 650 Hz
- Sensitivity (@ 1 V const.) 108 dBOFL \pm 3 dB @ 1 kHz

Frequency Response

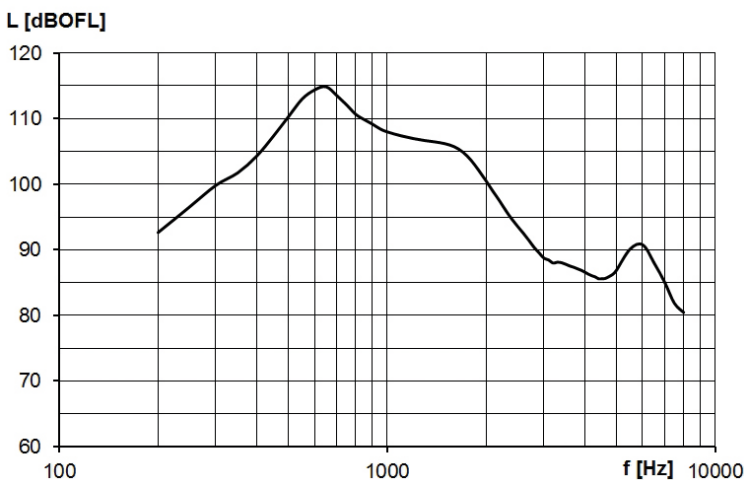

Warnings


- In order to avoid possible damage, the fitting of the device must be carried out by an authorized hearing aid expert!
- Swallowing of Bone Conductors may be hazardous to your health and may cause severe injuries and even death!
- Keep Bone Conductor, which you have taken off, out of reach of other persons or children!
- For extra hygienic and skin-protective cleaning, special cleaning products must be used!



Measuring Conditions

- Artificial Mastoid Brüel & Kjaer 4930 with static force 2.5 N
- 1 V constant supply

Impedance Curve

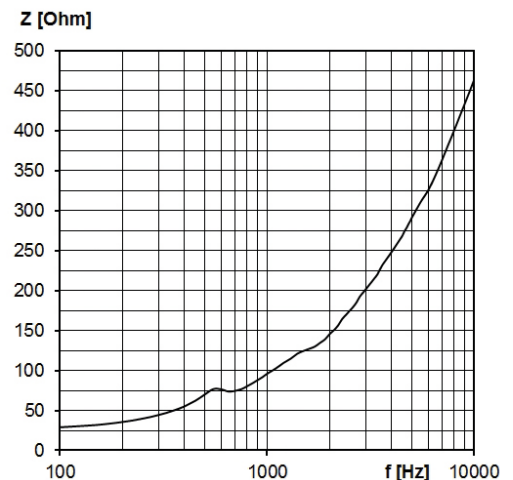

CE According to EU directive 93/42/EEC
0297 Quality management system according to DIN EN ISO 13485

Changes may be done without any notice in order to improve product performance.