

# KH30-12 SNAPON

## Bone Conductor - Data Sheet

### Mechanical Data

- Weight approx. 5.4 g
- Dimensions  
Length: 22.8 mm  
Width: 15.2 mm  
Height: 13.5 mm (with SNAPON)  
10.7 mm (without SNAPON)
- Housing Colours Black, White
- Connection 2-pin (acc. DIN IEC 60118-12)




### Electrical Data

- DC Resistance 40 Ohm  $\pm$  10 %
- Nominal Impedance @ 1 kHz 90 Ohm  $\pm$  20 %
- Max. Output (@ 1 V const.) 112 dB OVFL  $\pm$  3 dB @ 700 Hz
- Sensitivity (@ 1 V const.) 106 dB OVFL  $\pm$  3 dB @ 1 kHz


### Measuring Conditions

- Artificial Mastoid Bruel & Kjaer 4930 with static force 2.5 N
- 1 V constant supply
- Compensation for the transmission through the Artificial Mastoid via post processing of all measurements

### Frequency Response

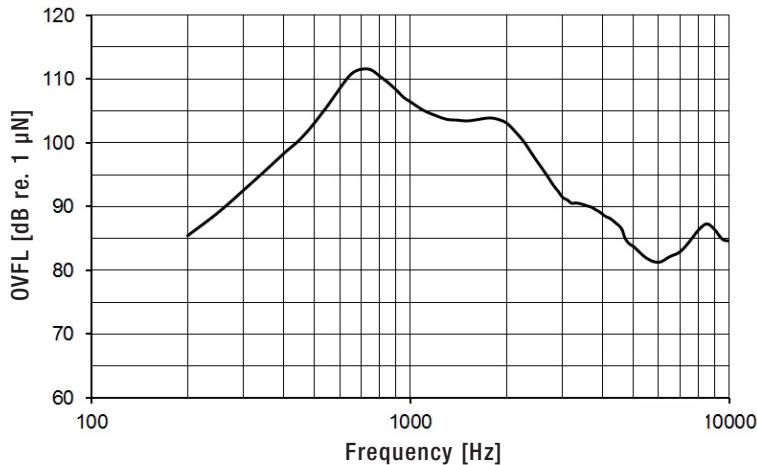

### Impedance Curve

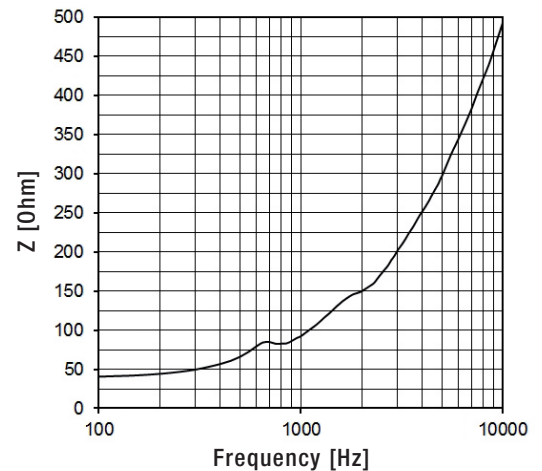

### Warnings

- In order to avoid possible damage, the fitting of the device must be carried out by an authorized hearing aid expert!
- Swallowing of Bone Conductors may be hazardous to your health and may cause severe injuries and even death!
- Keep Bone Conductor, which you have taken off, out of reach of other persons or children!
- For extra hygienic and skin-protective cleaning, special cleaning products must be used!



Changes may be done without any notice in order to improve product performance.